



Since its very beginning, SOPACOM Industry has been specializing in one activity: "Collective catering's installations" (ware-wash installations); it quickly became the European leader within its sector.

Industrial dishwashers must treat a significant amount of tableware pieces continuously. Given that the industrial dishwashers need to be permanently powered when in duty, a serious rigorous study of the environment where the installation will take place must be done.

As proven by our hundreds of projects, there's almost no obstacle to the implementation of our laundry installations; since they adapt to all horizontal and vertical paths around an organization; in a way, our installations may seem similar, but each one is certainly identical. Our installations may include, but are not limited to: Removal, selective sorting, transportation, Stall, Machine Input, Output machine Waste Treatment, Storage.

Our experience, our know-how, our listening capacity and responsiveness allowed us to design and produce the most comprehensive, sophisticated range of mechanical equipment.

The Technicord: Mechanized ware wash environment

Our straight beams, which are available in 6 different widths and lengths, always come in one piece. The curved footprints, which are stamped in the beam (exclusive technology), guide the 15 mm diameter polyurethane ropes. This unique technique avoids the friction; hence noise of a permanent contact, reduces wear, and allows quick and easy cleaning of the conveyor.

Our line of 'Technicord' range includes all the elements for all kind of installations:

Curves, switches, single or multiple mechanization trap shot, magnetic extractor, scraper, and hundreds of equipment and accessories.

In addition, many technical features such as the storage system, bevel, remote control or timer clocked in advance, are compatible with our Technicord.

Our realization speak for us

The **Technicord**











motorized angle charger



Constant level trays' cart Roller ramp width 500 mm Unit detector stopping sensor




Mobile sorting table 1100x600 and 600x600





Cutlery's magnetic extractor Mobile reception sink for cutlery reception



Linking table with covering for frontal sorting 500x510 or customized





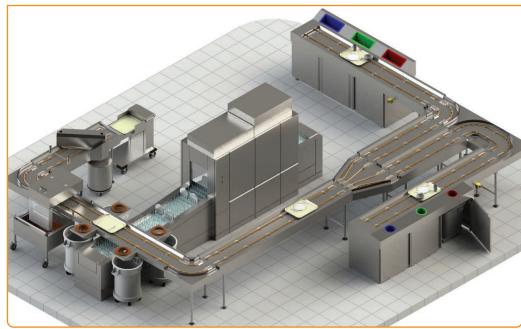








Special support leg for inclined Technicord



Distant 'Go/stop' command unit



Conveyor of special width 80 mm




Additional emergency 'Stop' button



Leg supported sorting bridge 550 x 700 mm



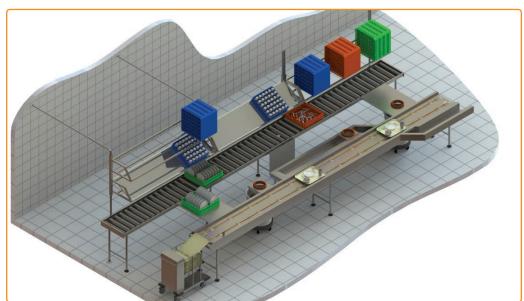






Wet trough, width 220mm 'conveyor sediment's'







Leg supported sorting table lenght 300 mm



Folding or removable sorting bridge 550x800 mm or 550 x 700 mm




Removable sorting block quipped with a waste hole for side sorting 45° curve for wet trough



Removable sorting block quipped with a waste hole for frontal orting



Removable sorting block equipped with a waste hole for side sorting



Folding sorting bridge 550 x 800 mm protruded waste hole



Wet trough of a 500 mm length for passing under the conveyor



